

SCHEDA TECNICA / TECHNICAL SHEET
ARMADI REFRIGERATI / REFRIGERATED COLD CABINETS
linea / line ANTARTIDE

mod / series Plus


PCC700TN
PCC700T2
PCC700BT

PCC700TN2P
PCC700T22P
PCC700BT2P

PCC700TNG
PCC700T2G
PCC700BTG

PCC700TNMR
PCC700BTMR
PCC700TNMR2P

PCC700BTMR2P
PCC700TNGMR
PCC700BTGMR

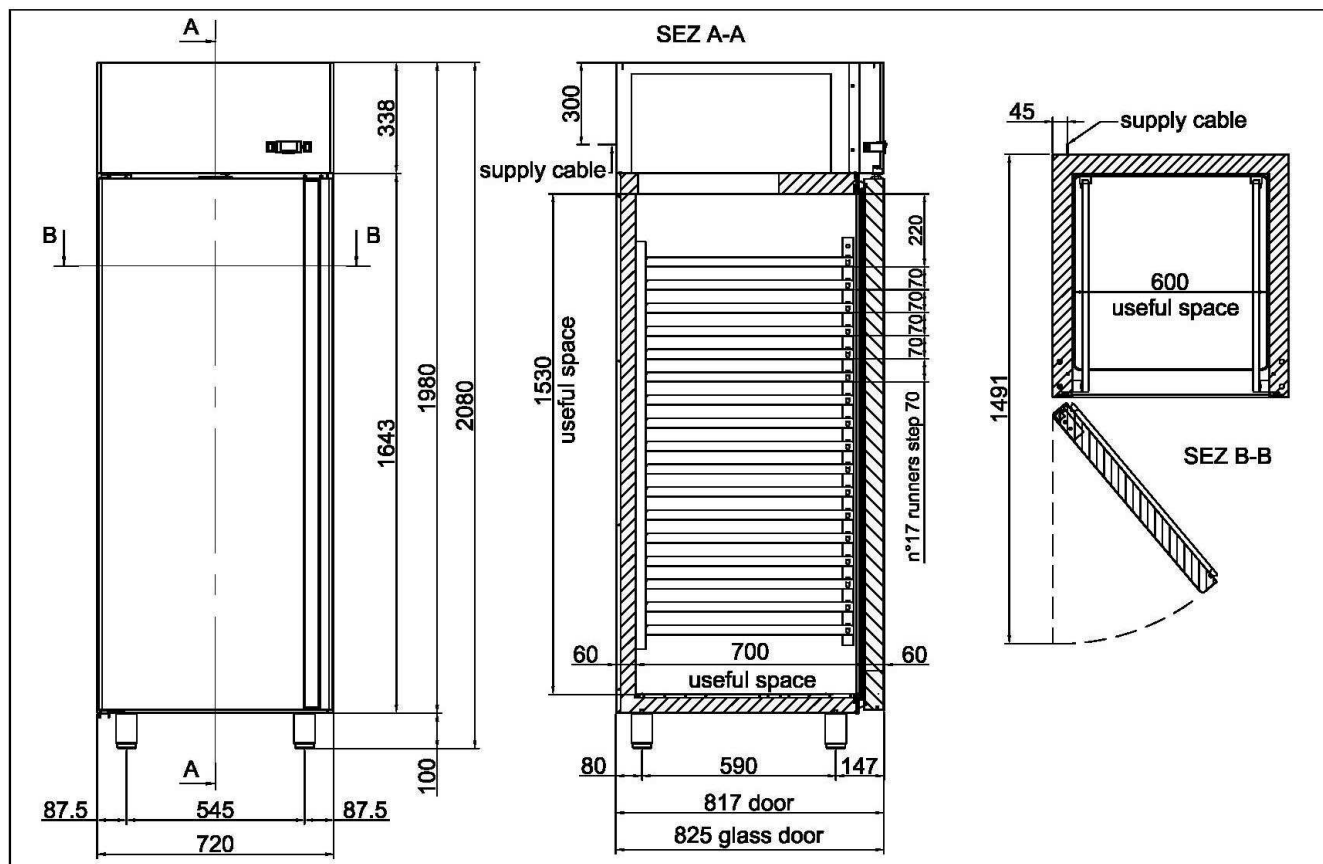

Descrizione

Armadio refrigerato realizzato in acciaio inox AISI serie 2. Unità refrigerante tropicalizzata (+40/42°C – 65% RH) con monoblocco estraibile, sbrinatorio automatico con raccolta dell'acqua di condensa nella vaschetta superiore. Monoscocca con coibentazione in poliuretano iniettato ad alta pressione senza CFC o HCFC spessore 60mm. Angoli interni arrotondati per favorire una pulizia ottimale. Guide porta griglie removibili. Porta a chiusura automatica con posizione di folle a 100° di apertura, reversibile verso destra o sinistra, guarnizione magnetica asportabile per una facile pulizia. Piedini in acciaio inox regolabili in altezza, la fornitura standard prevede 3 griglie plastificate bianche GN 2/1 (650x530) e 6 (3dx+3sx) guida griglie a "C" in acciaio, la serratura con chiave e la luce interna.

Allestimenti: personalizzazioni sulla maniglia e sul pannello comandi, porta vetro.

Optionals: kit ruote

Description

Refrigerated cold cabinet in stainless steel AISI series 2. Tropicalized refrigerating (+40/42°C – 65% RH) with removable motor, automatic defrosting with upper tray to convey condensation water.

Single-body, insulation 60 mm thick in polyurethane with high pressure injection without CFC o HCFC.

Internal rounded corners to facilitate an easy cleaning. Removable runners. Self-closing door with position in neutral at 100° of opening, removable magnetic gaskets for any easy cleaning. Stainless steel feet adjustable in height: standard supply consists of 3 white plastic coated grills GN 2/1 (650x530) and 6 (3dx+3sx) stainless steel runners, key lock and internal light.

Optionals: kit castors

Dati tecnici / Technical details:

Mod	Capacità di carico / Load capacity	Passo guide / Dist. runner	Capacità camera / Capacity	Temp °C	Gas refrig.	Temp. Amb. / Ambient temp	Assorb elettrico / Absorption	Alim elettr / voltage	Potenza frigor / Power	Peso netto / Net weight	Peso lordo / Gross weight	Dim.			Dim imb / Packing		
	Nº	mm	L	°C		°C / RH	W	V / Hz	W	kg	kg	mm			mm		
												L W	P D	H H	L W	P D	H H
PCC700TN	17 GN 2/1	70	700	0 / +10	R134a	+40/42 / 65	275	230-1 / 50-60	290 Tcd=+45°C Te= -10°C	116	130	720	815	2080	750	860	2240
PCC700T2				-2 / +10	R134a												
PCC700BT				-18/ -22	R507		641	230-1 / 50	360 Tcd=+45°C Te= -30°C	121	135						
PCC700TN2P				0 / +10	R134a												
PCC700T22P				-2 / +10	R134a		275	230-1 / 50-60	290 Tcd=+45°C Te= -10°C	130							
PCC700BT2P				-18/ -22	R507												
PCC700TNG				0 / +10	R134a		275	230-1 / 50-60	290 Tcd=+45°C Te= -10°C	133	147						
PCC700T2G				-2 / +10	R134a												
PCC700BTG				-18/ -22	R507		641	230-1 / 50	360 Tcd=+45°C Te= -30°C	138	152		825				

Rev 01

Dati tecnici / Technical details - Motore remoto / Remote unit :

Mod	Capacità di carico / Load capacity	Passo guide / Dist. runner	Capacità camera / Capacity	Temp °C	Gas refriger.	Temp. Amb. / Ambient temp	Assorb elettrico / Absorption	Alim elettr / voltage	Potenza frigor / Power	Peso netto / Net weight	Peso lordo / Gross weight	Dim.			Dim imb / Packing		
	№	mm	L	°C		°C / RH	W	V / Hz	W	kg	kg	mm			mm		
												L W	P D	H H	L W	P D	H H
PCC700TNMR	17 GN 2/1	70	700	0 / +10	R134a	+40/42 / 65	23	230-1 / 50-60	290 Tcd=+45°C Te= -10°C	108	122	720	815	2080	750	860	2240
PCC700BTMR				-18/ -22	R507				360 Tcd=+45°C Te= -30°C								
PCC700TNMR2P				0 / +10	R134a				290 Tcd=+45°C Te= -10°C	113	127						
PCC700BTMR2P				-18/ -22	R507				360 Tcd=+45°C Te= -30°C								
PCC700TNGMR				0 / +10	R134a				290 Tcd=+45°C Te= -10°C	125	138		825				
PCC700BTGMR				-18/ -22	R507				360 Tcd=+45°C Te= -30°C								

Rev 01